



## Цельные твердосплавные сверла

Сверла FBL с плоским торцом и с внутренним подводом СОЖ

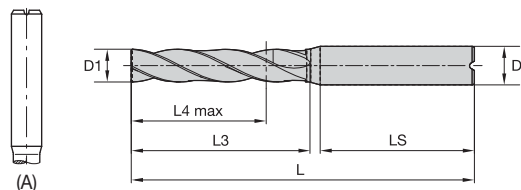

- лучший выбор  
○ альтернативный выбор

H	Gray
S	Orange
N	Green
K	Red
M	Yellow
P	Blue

## ■ B707A-FBL

мм	дюйм	дробное значение	буквенное обозначение	номер заказа	номер по каталогу	D	L	L3	L4 max	LS	KC7315
D1	D1	D1	D1 размер								
3,000	.1181	—	—	3885689	B707A03000FBL	6	62	20	14	36	●
3,175	.1250	1/8	—	3885690	B707A03175FBL	6	62	20	14	36	●
3,500	.1378	—	—	3885691	B707A03500FBL	6	62	20	14	36	●
4,000	.1575	—	—	3885692	B707A04000FBL	6	66	24	17	36	●
4,400	.1732	—	—	3885823	B707A04400FBL	6	66	24	17	36	●
4,500	.1772	—	—	3885824	B707A04500FBL	6	66	24	17	36	●
4,800	.1890	—	12	3885825	B707A04800FBL	6	66	28	20	36	●
5,000	.1969	—	—	3885826	B707A05000FBL	6	66	28	20	36	●
5,560	.2189	—	—	3885827	B707A05560FBL	6	66	28	20	36	●
5,900	.2323	—	—	3885828	B707A05900FBL	6	66	28	20	36	●
6,000	.2362	—	—	3885829	B707A06000FBL	6	66	28	20	36	●
6,350	.2500	1/4	E	3885830	B707A06350FBL	8	79	34	24	36	●
6,500	.2559	—	—	3885831	B707A06500FBL	8	79	34	24	36	●
6,800	.2677	—	—	3885832	B707A06800FBL	8	79	34	24	36	●
7,000	.2756	—	—	3885833	B707A07000FBL	8	79	34	24	36	●
7,500	.2953	—	—	3885834	B707A07500FBL	8	79	41	29	36	●
7,938	.3125	5/16	—	3885835	B707A07938FBL	8	79	41	29	36	●
8,000	.3150	—	—	3885836	B707A08000FBL	8	79	41	29	36	●
8,500	.3346	—	—	3885837	B707A08500FBL	10	89	47	35	40	●
8,800	.3465	—	—	3885838	B707A08800FBL	10	89	47	35	40	●
9,000	.3543	—	—	3885839	B707A09000FBL	10	89	47	35	40	●
9,500	.3740	—	—	3885840	B707A09500FBL	10	89	47	35	40	●
9,525	.3750	3/8	—	3885841	B707A09525FBL	10	89	47	35	40	●
10,000	.3937	—	—	3885842	B707A10000FBL	10	89	47	35	40	●
10,320	.4063	13/32	—	3885843	B707A10320FBL	12	102	55	40	45	●
10,500	.4134	—	—	3885844	B707A10500FBL	12	102	55	40	45	●
11,000	.4331	—	—	3885845	B707A11000FBL	12	102	55	40	45	●
11,111	.4374	—	—	3885846	B707A11111FBL	12	102	55	40	45	●
11,509	.4531	29/64	—	3885847	B707A11509FBL	12	102	55	40	45	●
11,570	.4555	—	—	3885848	B707A11570FBL	12	102	55	40	45	●

Точность изготовления

(продолжение)

МЕТРИЧЕСКАЯ СИСТЕМА				ДЮЙМОВАЯ СИСТЕМА			
D1	Допуск m7	D	Допуск h6	D1	Допуск m7	D	Допуск h6
>от 3 до 6	0,004/0,016	6	0,000/-0,008	>от 0,1181 до 0,2362	0,0002/0,0024	0,2362	0,0000/-0,0003
>от 6 до 10	0,006/0,021	от 8 до 10	0,000/-0,009	>от 0,2362 до 0,3937	0,0002/0,0008	от 0,3150 до 0,3937	0,0000/-0,0004
>от 10 до 18	0,007/0,025	от 12 до 18	0,000/-0,011	>от 0,3937 до 0,7087	0,0003/0,001	от 0,4724 до 0,7087	0,0000/-0,0004
>от 18 до 21	0,008/0,029	20	0,000/-0,013	>от 0,7087 до 0,8268	0,0003/0,0011	0,7874	0,0000/-0,0005