


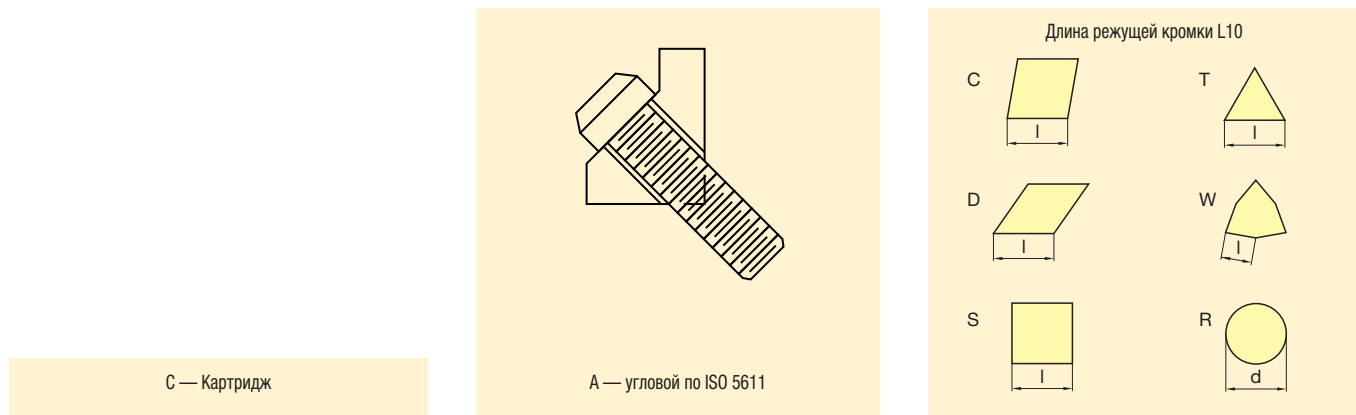



7. Кодирование картриджа

8. Крепление Картридж

9. Размер пластины

6. Размер картриджа

20 C A - 12

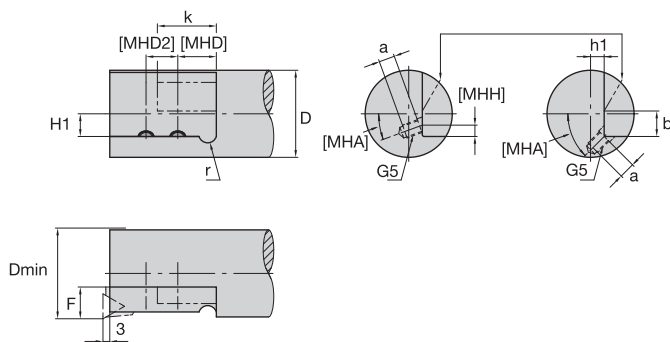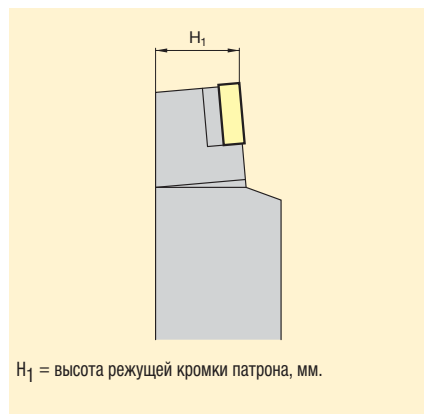

**Установочные
размеры патрона**

ПРИМЕЧАНИЕ. Все размеры ниже
выражены в мм

Размер патрона	H1	h1	Dmin	D	a	b	[MHD]	F	k	r	[MHH]	[MHD2]	[MHA]	[G5]
8	6	2,0	20	17	10	11	12	8	12,0	4,0	3,5	-	20	M 3,5 x 0,60
10	8	2,5	25	22	10	14	17	10	18,5	5,0	4,5	-	20	M 4,0 x 0,70
12	10	6,0	40	37	14	16	20	14	26,0	8,0	5,0	-	20	M 6,0 x 1,00
16	12	5,0	50	47	14	21	20	20	28,0	9,5	6,0	-	20	M 6,0 x 1,00
20	16	5,0	60	57	15	24	25	25	34,0	9,5	-	-	45	M 8,0 x 1,25
25	20	10,0	70	67	15	31	30	25	36,0	9,5	-	-	45	M 8,0 x 1,25
	25	18,0	100	97	19	36	30	32	60,0	12,5	-	20	45	M 10,0 x 1,50