


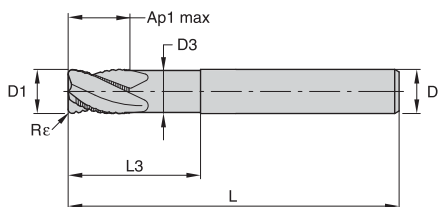


- Стандартные размеры Kennametal.
- Режущая кромка у центра.
- Стружколомающая геометрия.



- лучший выбор
- альтернативный выбор

KCPM15		KCPM15		D1	D	Ap1 max	L3	L	Re	D3
F4BS0600AWM38R050	F4BS0600BWM38R050	F4BS0600AWM38R100	F4BS0600BWM38R100	6,00	6,00	9,00	18,00	63,00	0,50	5,80
F4BS0800AWM38R050	F4BS0800BWM38R050	F4BS0800AWM38R100	F4BS0800BWM38R100	8,00	8,00	12,00	24,00	68,00	0,50	7,80
F4BS1000AWL38R050	F4BS1000BWL38R050	F4BS1000AWL38R100	F4BS1000BWL38R100	10,00	10,00	15,00	30,00	76,00	0,50	9,50
F4BS1000AWL38R200	F4BS1000BWL38R200	F4BS1000AWL38R300	F4BS1000BWL38R300	10,00	10,00	15,00	30,00	76,00	2,00	9,50
F4BS1000AWL38R400	F4BS1000BWL38R400	F4BS1200AWL38R050	F4BS1200BWL38R050	10,00	10,00	15,00	30,00	76,00	4,00	9,50
F4BS1200AWL38R100	F4BS1200BWL38R100	F4BS1200AWL38R200	F4BS1200BWL38R200	12,00	12,00	18,00	36,00	84,00	0,50	11,50
F4BS1200AWL38R300	F4BS1200BWL38R300	F4BS1200AWL38R400	F4BS1200BWL38R400	12,00	12,00	18,00	36,00	84,00	1,00	11,50
F4BS1600AWX38R050	F4BS1600BWX38R050	F4BS1600AWX38R100	F4BS1600BWX38R100	16,00	16,00	24,00	48,00	100,00	0,50	15,00
F4BS1600AWX38R200	F4BS1600BWX38R200	F4BS1600AWX38R300	F4BS1600BWX38R300	16,00	16,00	24,00	48,00	100,00	1,00	15,00
F4BS1600AWX38R400	F4BS1600BWX38R400	F4BS2000AWX38R050	F4BS2000BWX38R050	16,00	16,00	24,00	48,00	100,00	2,00	15,00
F4BS2000AWX38R100	F4BS2000BWX38R100	F4BS2000AWX38R200	F4BS2000BWX38R200	20,00	20,00	30,00	60,00	115,00	0,50	19,00
F4BS2000AWX38R300	F4BS2000BWX38R300	F4BS2000AWX38R400	F4BS2000BWX38R400	20,00	20,00	30,00	60,00	115,00	1,00	19,00
F4BS2500AWX38R050	F4BS2500BWX38R050	F4BS2500AWX38R100	F4BS2500BWX38R100	20,00	20,00	30,00	60,00	115,00	2,00	19,00
F4BS2500AWX38R200	F4BS2500BWX38R200	F4BS2500AWX38R300	F4BS2500BWX38R300	25,00	25,00	37,50	75,00	135,00	0,50	24,00
F4BS2500AWX38R400	F4BS2500BWX38R400	F4BS2500AWX38R100	F4BS2500BWX38R100	25,00	25,00	37,50	75,00	135,00	1,00	24,00
F4BS2500AWX38R200	F4BS2500BWX38R200	F4BS2500AWX38R300	F4BS2500BWX38R300	25,00	25,00	37,50	75,00	135,00	2,00	24,00
F4BS2500AWX38R400	F4BS2500BWX38R400	F4BS2500AWX38R100	F4BS2500BWX38R100	25,00	25,00	37,50	75,00	135,00	3,00	24,00
F4BS2500AWX38R200	F4BS2500BWX38R200	F4BS2500AWX38R300	F4BS2500BWX38R300	25,00	25,00	37,50	75,00	135,00	4,00	24,00

Цельные концевые фрезы

ПРИМЕЧАНИЕ: рекомендации по применению см. на стр. M23.

Точность изготовления концевых фрез

D1	допуск e8	D	допуск h6
≤3	-0,014/-0,028	≤3	+0/-0,006
>3-6	-0,020/-0,038	>3-6	+0/-0,008
>6-10	-0,025/-0,047	>6-10	+0/-0,009
>10-18	-0,032/-0,059	>10-18	+0/-0,011
>18-30	-0,040/-0,073	>18-30	+0/-0,013