
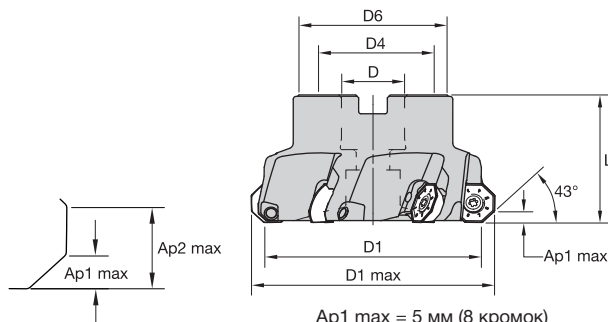


- Восемь режущих кромок на пластине.
- Исключительно плавное резание.




Ap1 max = 5 мм (8 кромок)  
Ap2 max = 11 мм (4 кромки), уменьшите подачу на 40%

■ KSOM • Насадные фрезы

номер заказа	номер по каталогу	D1	D1 max	D	D4	D6	L	Ap1 max	Z	max угол врезания	кг	max частота вращения
3115873	KSOM63R04OF07	63	74,3	22	—	50	43	5,0	4	5.5°	0,61	10100
3115882	KSOM63R05OF07	63	74,3	22	—	50	43	5,0	5	5.5°	0,55	10100
3115875	KSOM80R04OF07	80	91,2	27	—	60	50	5,0	4	4.0°	1,14	7900
3115874	KSOM80R06OF07	80	91,2	27	—	60	50	5,0	6	4.0°	1,06	7900
3115877	KSOM100R05OF07	100	110,9	32	—	80	50	5,0	5	3.0°	1,66	6300
3115876	KSOM100R08OF07	100	110,9	32	—	80	50	5,0	8	3.0°	1,57	6300
3115879	KSOM125R06OF07	125	136,0	40	—	90	63	5,0	6	2.3°	2,56	5000
3115878	KSOM125R10OF07	125	136,0	40	—	90	63	5,0	10	2.3°	2,68	5000
3115881	KSOM160R07OF07	160	170,9	40	66,7	110	63	5,0	7	1.7°	4,20	3900
3115880	KSOM160R12OF07	160	170,9	40	66,7	110	63	5,0	12	1.7°	4,34	3900

■ Комплектующие

Торцевые фрезы



D1	винт пластины	Нм	ключ Torx Plus	винт с потайной головкой	крепёжный винт с каналом для СОЖ в сборе	винт с крестовой головкой	насадка для подачи СОЖ
63	193.409	6,0	TTP20	125.025	—	—	—
80	193.409	6,0	TTP20	125.230	—	—	—
100	193.409	6,0	TTP20	—	MS2189C	—	—
125	193.409	6,0	TTP20	—	—	420.200	470.232
160	193.409	6,0	TTP20	—	—	420.200	470.233