


Твердосплавная расточная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. В92–В95 и В189–В190.



■ E-SCLP 95°

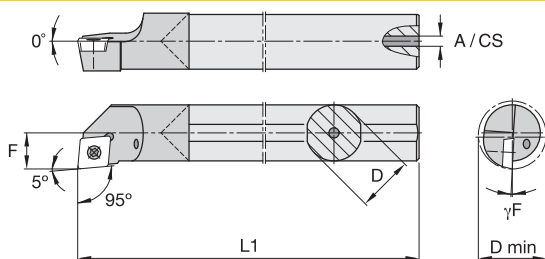


номер по каталогу	D	D min	F	L1	A	γF°	эталонная пластина	винт пластины	Torx
правое исполнение									
E08KSCLPR06A	8	11,0	6,0	122	2,4	-6.0	CP..060204	MS1939	T7
E10MSCLPR06A	10	13,0	7,0	150	3,2	-4.0	CP..060204	MS1939	T7
E12QSCLPR06	12	16,0	9,0	180	4,8	-3.0	CP..060204	MS1153	T7
E16RSCLPR09	16	20,0	11,0	200	5,5	-4.0	CP..09T308	MS1155	T15
E20SSCLPR09	20	25,0	13,0	250	7,1	-2.0	CP..09T308	MS1155	T15
левое исполнение									
E08KSCLPL06A	8	11,0	6,0	122	2,4	-6.0	CP..060204	MS1939	T7
E10MSCLPL06A	10	13,0	7,0	150	3,2	-4.0	CP..060204	MS1939	T7
E12QSCLPL06	12	16,0	9,0	180	4,8	-3.0	CP..060204	MS1153	T7
E16RSCLPL09	16	20,0	11,0	200	5,5	-4.0	CP..09T308	MS1155	T15
E20SSCLPL09	20	25,0	13,0	250	7,1	-2.0	CP..09T308	MS1155	T15



Усиленная оправка с внутренним подводом СОЖ.

Сведения о пластинах см. на стр. В92–В95 и В189–В190.

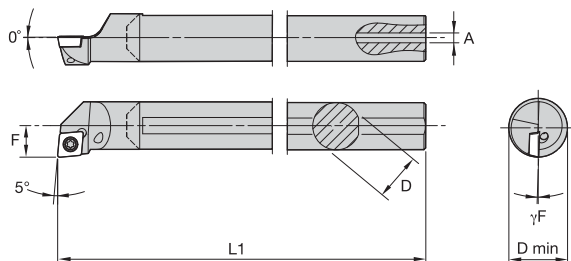

■ L-SCLP 95°



номер по каталогу	D	D min	F	L1	L2	A	γF°	эталонная пластина	винт пластины	Torx
правое исполнение										
L08KSCLPR06	8	11,0	6,0	123	17,62	2,4	-6.0	CPMT060204..	MS1939	T7
L10MSCLPR06	10	13,0	7,0	149	21,65	3,2	-4.0	CPMT060204..	MS1939	T7
L12QSCLPR06	12	16,0	9,0	181	22,35	4,0	-3.0	CPMT060204..	MS1153	T7
L16RSCLPR09	16	20,0	11,0	203	28,57	4,0	-4.0	CPMT09T308..	MS1155	T15
L20SSCLPR09	20	25,0	13,0	251	33,61	4,0	-2.0	CPMT09T308..	MS1155	T15
левое исполнение										
L08KSCLPL06	8	11,0	6,0	123	17,62	2,4	-6.0	CPMT060204..	MS1939	T7
L10MSCLPL06	10	13,0	7,0	149	21,65	3,2	-4.0	CPMT060204..	MS1939	T7
L12QSCLPL06	12	16,0	9,0	181	22,35	4,0	-3.0	CPMT060204..	MS1153	T7
L16RSCLPL09	16	20,0	11,0	203	28,57	4,0	-4.0	CPMT09T308..	MS1155	T15
L20SSCLPL09	20	25,0	13,0	251	33,61	4,0	-2.0	CPMT09T308..	MS1155	T15