


Усиленная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. В98–В100 и В192–В194.



■ L-SDUP 93°

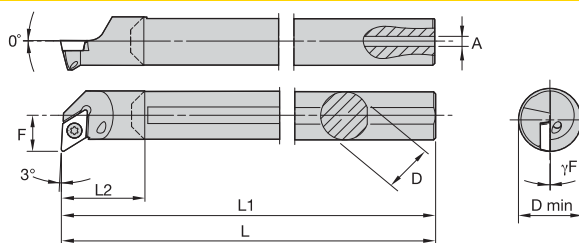


номер по каталогу	D	D min	F	L1	L	L2	A	γF°	эталонная пластина	винт пластины	Torx
правое исполнение											
L12QSDUPR07	12	16,0	9,0	181	181,170	22,4	4,0	-2.0	DP..070204..	MS1153	T7
L16RSDUPR07	16	20,0	11,0	199	199,410	25,4	4,0	0.0	DP..070204..	MS1153	T7
L20SSDUPR11	20	25,0	13,0	251	251,450	33,6	4,0	-2.0	DP..11T308..	MS1155	T15
левое исполнение											
L12QSDUPL07	12	16,0	9,0	181	181,170	22,4	4,0	-2.0	DP..070204..	MS1153	T7
L16RSDUPL07	16	20,0	11,0	199	199,410	25,4	4,0	0.0	DP..070204..	MS1153	T7
L20SSDUPL11	20	25,0	13,0	251	251,450	33,6	4,0	-2.0	DP..11T308..	MS1155	T15



Твердосплавная расточная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. В98–В100 и В192–В194.

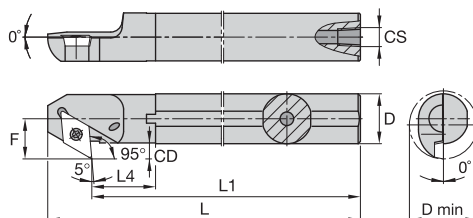

■ A-SDXP 95°




номер по каталогу	D	D min	F	L1	L	L4	CD	CS	эталонная пластина	винт пластины	Torx
правое исполнение											
A12MSDXPR07	12	16,0	9,0	150	162,0	17,07	3,09	1/16-27 NPT	DP..070204	MS1153	T7
A16RSDXPR07	16	20,0	11,0	200	212,0	18,15	3,20	1/8-27 NPT	DP..070204	MS1153	T7
A20SSDXPR11	20	25,0	13,0	250	270,0	50,80	4,31	1/8-27 NPT	DP..11T308	MS1155	T15
левое исполнение											
A12MSDXPL07	12	16,0	9,0	150	162,0	17,07	3,09	1/16-27 NPT	DP..070204	MS1153	T7
A16RSDXPL07	16	20,0	11,0	200	212,0	18,15	3,20	1/8-27 NPT	DP..070204	MS1153	T7
A20SSDXPL11	20	25,0	13,0	250	270,0	50,80	4,31	1/8-27 NPT	DP..11T308	MS1155	T15



Стальная расточная оправка с внутренним подводом СОЖ.

Сведения о пластинах см. на стр. В103–В104.

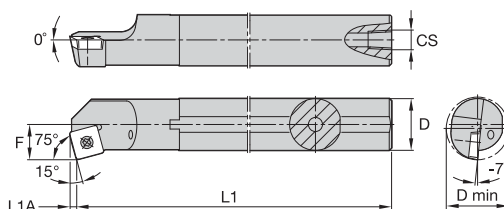

■ A-SSKC 75°



номер по каталогу	D	D min	F	L1	L1A	CS	эталонная пластина	винт пластины	Torx
правое исполнение									
A16RSSKCR09	16	20,0	11,0	200	2,2	1/8-27 NPT	SC..09T308	MS1155	T15