


Стальная расточная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. В113–В114 и В196–В197.



■ A-SVUB 93°

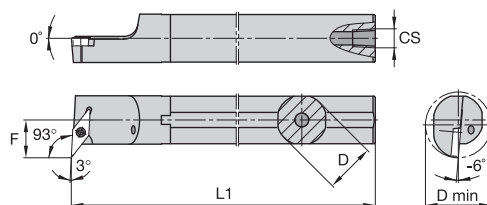


номер по каталогу	D	D min	F	L1	CS	эталонная пластина	винт пластины	Torx
правое исполнение								
A20SSVUBR11	20	25,0	13,0	250	1/8-27 NPT	VB..110304	MS1153	T7
A25TSVUBR16	25	32,0	17,0	300	1/4-18 NPT	VB..160408	MS1155	T15
левое исполнение								
A20SSVUBL11	20	25,0	13,0	250	1/8-27 NPT	VB..110304	MS1153	T7
A25TSVUBL16	25	32,0	17,0	300	1/4-18 NPT	VB..160408	MS1155	T15



Стальная расточная оправка с внутренним подводом СОЖ.

Сведения о пластинах см. на стр. В114–В115.

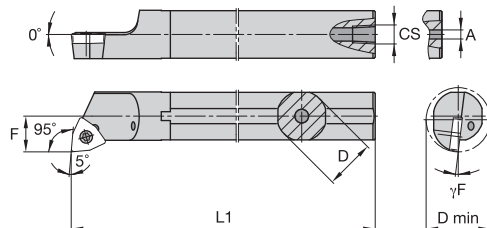

■ A-SWLC 95°



номер по каталогу	D	D min	F	L1	A	CS	γF°	эталонная пластина	винт пластины	Torx
правое исполнение										
A10KSWLCR04	10	13,0	7,0	125	3,0	—	-7.0	WC..040204	MS1153	T7
A12MSWLCR04	12	16,0	9,0	150	—	1/16-27 NPT	-6.0	WC..040204	MS1153	T7
A16RSWLCR06	16	20,0	11,0	200	—	1/8-27 NPT	-7.0	WC..06T308	MS1155	T15
A20SSWLCR06	20	25,0	13,0	250	—	1/8-27 NPT	-5.0	WC..06T308	MS1155	T15
левое исполнение										
A12MSWLCCL04	12	16,0	9,0	150	—	1/16-27 NPT	-6.0	WC..040204	MS1153	T7
A16RSWLCCL06	16	20,0	11,0	200	—	1/8-27 NPT	-7.0	WC..06T308	MS1155	T15