


Стальная расточная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. В40–В49 и В174–В176.



■ A-PCLN 95°

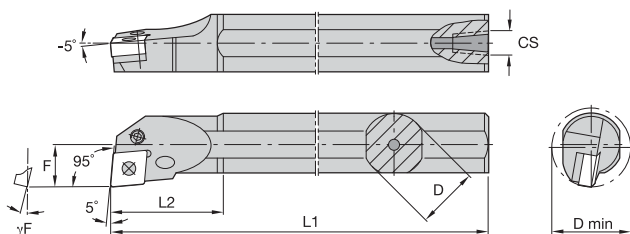


номер по каталогу	D	D min	F	L1	L2	CS	γF°	эталонная пластина	опорная пластина	штифт опорной пластины	штифт	рычаг	винт рычага	Torx Plus
правое исполнение														
A25TPCLNR12	25	32,0	17,0	300	40	1/4-18 NPT	-12.0	CN..120408	—	—	—	511.022	514.122	10 IP
A32UPCLNR12	32	40,0	22,0	350	50	1/4-18 NPT	-10.0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
A40VPCLNR12	40	50,0	27,0	400	55	1/4-18 NPT	-10.0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
A32UPCLNR16	32	50,0	22,0	350	50	1/4-18 NPT	-10.0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
A40VPCLNR16	40	50,0	27,0	400	55	1/4-18 NPT	-11.0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
левое исполнение														
A25TPCLNL12	25	32,0	17,0	300	40	1/4-18 NPT	-12.0	CN..120408	—	—	—	511.022	514.122	10 IP
A32UPCLNL12	32	40,0	22,0	350	50	1/4-18 NPT	-10.0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
A40VPCLNL12	40	50,0	27,0	400	55	1/4-18 NPT	-10.0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
A32UPCLNL16	32	50,0	22,0	350	50	1/4-18 NPT	-10.0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
A40VPCLNL16	40	50,0	27,0	400	55	1/4-18 NPT	-11.0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP



Стальная расточная оправка с внутренним подводом СОЖ.

Сведения о пластинах см. на стр. В59–В66 и В178–В179.

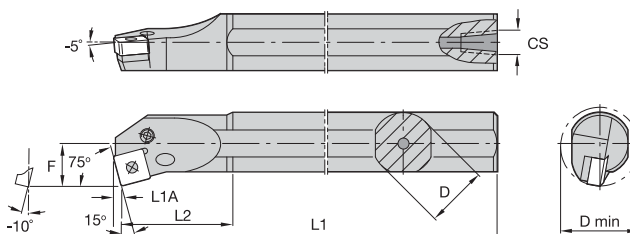

■ A-PSKN 75°



номер по каталогу	D	D min	F	L1	L2	L1A	CS	эталонная пластина	опорная пластина	штифт опорной пластины	штифт	рычаг	винт рычага	Torx Plus
правое исполнение														
A25TPSKNR12	25	30,0	17,0	300	43	3	1/4-18 NPT	SN..120408	—	—	—	511.022	514.122	10 IP
A32UPSKNR12	32	40,0	22,0	350	52	3	1/4-18 NPT	SN..120408	512.063	513.023	515.018	511.023	514.124	15 IP
A40VPSKNR12	40	48,0	27,0	400	57	3	1/4-18 NPT	SN..120408	512.063	513.023	515.018	511.023	514.124	15 IP
левое исполнение														
A25TPSKNL12	25	30,0	17,0	300	43	3	1/4-18 NPT	SN..120408	—	—	—	511.022	514.122	10 IP
A32UPSKNL12	32	40,0	22,0	350	52	3	1/4-18 NPT	SN..120408	512.063	513.023	515.018	511.023	514.124	15 IP