


Стальная расточная оправка с внутренним подводом СОЖ.


Сведения о пластинах см. на стр. B66–B73 и B179–B180.



■ A-PTFN 90°

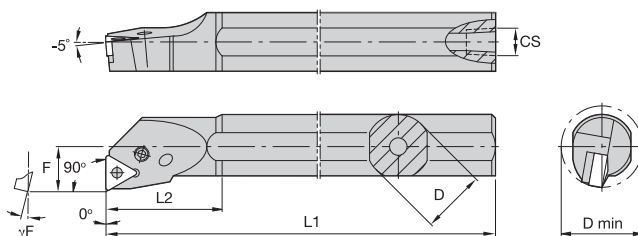


номер по каталогу	D	D min	F	L1	L2	CS	γF°	эталонная пластина	опорная пластина	штифт опорной пластины	штифт	рычаг	винт рычага	Torx Plus
правое исполнение														
A16RPTFNR11	16	20,0	11,0	200	28	1/8-27 NPT	-14.0	TN..110304	—	—	—	511.011	514.111	8 IP
A20SPTFNR11	20	25,0	13,0	250	30	1/8-27 NPT	-12.0	TN..110304	—	—	—	511.011	514.111	8 IP
A25TPTFNR16	25	32,0	17,0	300	40	1/4-18 NPT	-12.0	TN..160408	512.013	513.018	515.018	511.018	514.118	10 IP
A32UPTFNR16	32	40,0	22,0	350	50	1/4-18 NPT	-10.0	TN..160408	512.013	513.018	515.018	511.018	514.118	10 IP
A40VPTFNR22	40	48,0	27,0	400	55	1/4-18 NPT	-10.0	TN..220408	512.023	513.023	515.018	511.023	514.123	15 IP
левое исполнение														
A16RPTFNL11	16	20,0	11,0	200	28	1/8-27 NPT	-14.0	TN..110304	—	—	—	511.011	514.111	8 IP
A20SPTFNL11	20	25,0	13,0	250	30	1/8-27 NPT	-12.0	TN..110304	—	—	—	511.011	514.111	8 IP
A25TPTFNL16	25	32,0	17,0	300	40	1/4-18 NPT	-12.0	TN..160408	512.013	513.018	515.018	511.018	514.118	10 IP
A32UPTFNL16	32	40,0	22,0	350	50	1/4-18 NPT	-10.0	TN..160408	512.013	513.018	515.018	511.018	514.118	10 IP
A40VPTFNL22	40	48,0	27,0	400	55	1/4-18 NPT	-10.0	TN..220408	512.023	513.023	515.018	511.023	514.123	15 IP



Стальная расточная оправка с внутренним подводом СОЖ.

Сведения о пластинах см. на стр. B79–B83 и B181.

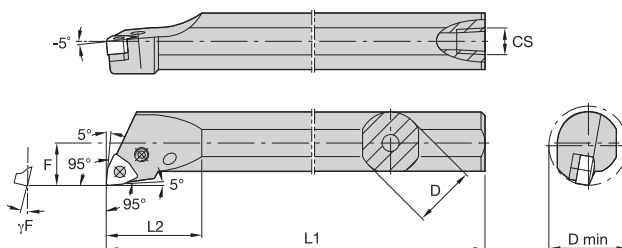

■ A-PWLN 95°



номер по каталогу	D	D min	F	L1	L2	CS	γF°	эталонная пластина	опорная пластина	штифт опорной пластины	штифт	рычаг	винт рычага	Torx Plus
правое исполнение														
A16RPWLNR06	16	27,0	11,0	200	32	1/8-27 NPT	-12.0	WN..060404	—	—	—	511.030	514.112	8 IP
A20SPWLNR06	20	25,0	13,0	250	32	1/8-27 NPT	-14.0	WN..060408	—	—	—	511.030	514.112	8 IP
A25RPWLNR08	25	32,0	17,0	200	40	1/4-18 NPT	-12.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
A32SPWLNR08	32	40,0	22,0	250	50	1/4-18 NPT	-10.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
A40TPWLNR08	40	50,0	27,0	300	55	1/4-18 NPT	-8.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
левое исполнение														
A16RPWLNL06	16	27,0	11,0	200	32	1/8-27 NPT	-12.0	WN..060404	—	—	—	511.030	514.112	8 IP
A20SPWLNL06	20	25,0	13,0	250	32	1/8-27 NPT	-14.0	WN..060408	—	—	—	511.030	514.112	8 IP
A25RPWLNL08	25	32,0	17,0	200	40	1/4-18 NPT	-12.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
A32SPWLNL08	32	40,0	22,0	250	50	1/4-18 NPT	-10.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
A40TPWLNL08	40	50,0	27,0	300	55	1/4-18 NPT	-8.0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP