



Расточные головки с креплением винтом

Пластины с креплением винтом



С внутренним подводом СОЖ.
Сведения о пластинах см. на
стр. В88–В91 и В187–В188.

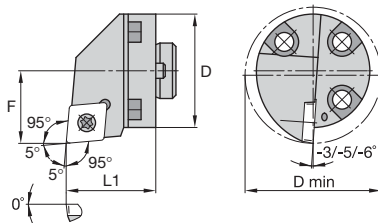

■ H-SCLC 95°



номер по каталогу	D	F	L1	D min	эталонная пластина	винт пластины	Torx
правое исполнение							
H25SCLCR09	25	17	20	32,000	CC..09T308	MS1155	T15
H25SCLCR12	25	17	25	32,000	CC..120408	MS1157	T15
H32SCLCR09	32	22	25	40,000	CC..09T308	MS1155	T15
H32SCLCR12	32	22	25	40,000	CC..120408	MS1158	T15
H40SCLCR09	40	27	41	50,000	CC..09T308	MS1156	T15
H40SCLCR12	40	27	41	50,000	CC..120408	MS1158	T15
H50SCLCR09	50	35	41	63,000	CC..09T308	MS1156	T15
H50SCLCR12	50	35	41	63,000	CC..120408	MS1158	T15
левое исполнение							
H25SCLCL09	25	17	20	32,000	CC..09T308	MS1155	T15
H25SCLCL12	25	17	25	32,000	CC..120408	MS1157	T15
H32SCLCL09	32	22	25	40,000	CC..09T308	MS1155	T15
H32SCLCL12	32	22	25	40,000	CC..120408	MS1158	T15
H40SCLCL09	40	27	41	50,000	CC..09T308	MS1156	T15
H40SCLCL12	40	27	41	50,000	CC..120408	MS1158	T15
H50SCLCL09	50	35	41	63,000	CC..09T308	MS1156	T15
H50SCLCL12	50	35	41	63,000	CC..120408	MS1158	T15

Инструмент для наружной и внутренней обработки