


Сведения о пластинах см. на стр. B59–B66 и B178–B179.

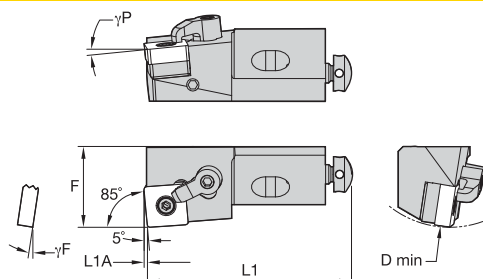

■ MSYN 85°

номер по каталогу правое исполнение	D min	F	L1	L1A	γF°	γP°	эталонная пластина
MSYNR10CA09	40	14,0	50	0,75	-9.0	-5.0	SN..090308/SN..322
MSYNR12CA12	50	20,0	55	1,02	-9.0	-5.0	SN..120408/SN..432
MSYNR16CA12	60	25,0	63	1,02	-9.0	-5.0	SN..120408/SN..432
MSYNR25CA19	100	32,0	100	1,54	-9.0	-5.0	SN..190612/SN..643
левое исполнение							
MSYNL10CA09	40	14,0	50	0,75	-9.0	-5.0	SN..090308/SN..322
MSYNL12CA12	50	20,0	55	1,02	-9.0	-5.0	SN..120408/SN..432
MSYNL16CA12	60	25,0	63	1,02	-9.0	-5.0	SN..120408/SN..432
MSYNL20CA15	70	25,0	70	1,26	-9.0	-5.0	SN..150612/SN..543

■ Комплектующие



D min	опорная пластина	стопорный штифт	hex	прижим	крепежный винт	hex	радиальный регулируемый винт	hex	осевой регулируемый винт	крепежный винт	hex	шайба
40	—	KLM33	2 мм	СКМ36	STCM38	2 мм	KUAM28	2 мм	KUAM30	191.405	4 мм	CSWM 060 050
50	—	KLM43	2 мм	СКМ34	STCM38	2 мм	KUAM22	2 мм	KUAM31	191.406	4 мм	CSWM 060 050
60	ISSN432	KLM46S	2.5 мм	СКМ34	STCM9	2.5 мм	KUAM25	2.5 мм	KUAM32	191.407	5 мм	CSWM 080 050
60	ISSN432	KLM46S	2.5 мм	СКМ36	STCM9	2.5 мм	KUAM25	2.5 мм	KUAM32	191.407	5 мм	CSWM 080 050
70	SKSN566K	KLM54	2.5 мм	СКМ37	STCM40	2.5 мм	KUAM25	2.5 мм	KUAM33	191.407	6 мм	CSWM 080 050
100	ISSN633	KLM68	4 мм	СКМ34	STCM8	4 мм	KUAM27	4 мм	KUAM33	MS364	8 мм	CSWM 100 080