


Сведения о пластинах см. на стр. В66–В73 и В179–В180.

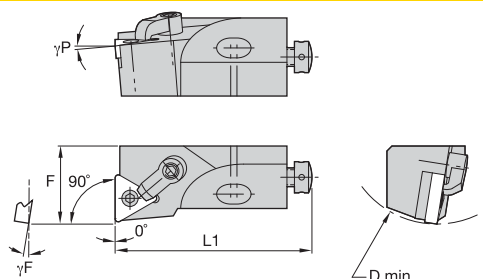

### ■ MTFN 90°

| номер по каталогу<br>правое исполнение | D min | F    | L1 | γF°  | γP°  | эталонная<br>пластина |
|----------------------------------------|-------|------|----|------|------|-----------------------|
| <b>MTFNR12CA16</b>                     | 50    | 20,0 | 55 | -9.0 | -5.0 | TN..160408/TN..332    |
| <b>MTFNR16CA16</b>                     | 60    | 25,0 | 63 | -9.0 | -5.0 | TN..160408/TN..332    |
| <b>MTFNR20CA22</b>                     | 70    | 25,0 | 70 | -9.0 | -5.0 | TN..220408/TN..432    |
| левое исполнение                       | D min | F    | L1 | γF°  | γP°  | эталонная<br>пластина |
| <b>MTFNL12CA16</b>                     | 50    | 20,0 | 55 | -9.0 | -5.0 | TN..160408/TN..332    |
| <b>MTFNL16CA16</b>                     | 60    | 25,0 | 63 | -9.0 | -5.0 | TN..160408/TN..332    |
| <b>MTFNL20CA22</b>                     | 70    | 25,0 | 70 | -9.0 | -5.0 | TN..220408/TN..432    |

### ■ Комплектующие



| D min | опорная<br>пластина | стопорный<br>штифт | hex    | прижим | крепежный<br>винт | hex    | радиальный<br>регулируемый<br>винт | hex    | осевой<br>регулируемый<br>винт | крепежный<br>винт | hex  | шайба        |
|-------|---------------------|--------------------|--------|--------|-------------------|--------|------------------------------------|--------|--------------------------------|-------------------|------|--------------|
| 50    | —                   | KLM33L             | 2 мм   | СКМ34  | STCM38            | 2 мм   | KUAM22                             | 2 мм   | KUAM31                         | 191.406           | 4 мм | CSWM 060 050 |
| 60    | ITSN322             | KLM34L             | 2 мм   | СКМ34  | STCM9             | 2 мм   | KUAM25                             | 2 мм   | KUAM32                         | 191.407           | 5 мм | CSWM 080 050 |
| 70    | ITSN433             | KLM46              | 2.5 мм | СКМ35  | STCM37            | 2.5 мм | KUAM25                             | 2.5 мм | KUAM32                         | 191.407           | 5 мм | CSWM 080 050 |

Инструмент для наружной и внутренней обработки