



Обработка канавок и отрезка

Отрезные лезвия A2™

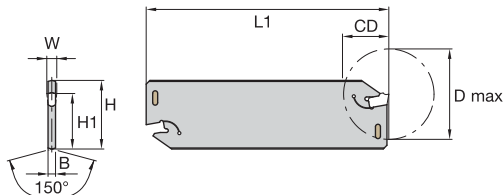

■ A2BNSN



Обработка канавок и отрезка

номер по каталогу	H	посадочный размер	W	H1	L1	B	D max	CD	ключ для сборки
левое исполнение									
A2BNSN19X1B13	19	1B	1,4	15,5	86	2	27	14	170.137
A2BNSN19X0116	19	1	1,6	15,5	86	2	30	16	170.137
A2BNSN19X02	19	2	2,2	15,5	86	2	—	20	170.137
A2BNSN26G1B15	26	1B	1,4	21,5	90	2	30	15	170.137
A2BNSN26J1B15	26	1B	1,4	21,5	110	2	30	15	170.137
A2BNSN26J0117	26	1	1,6	21,5	110	2	34	17	170.137
A2BNSN26M02	26	2	2,2	21,5	150	2	—	25	170.137
A2BNSN26G02	26	2	2,2	21,5	90	2	—	25	170.137
A2BNSN26J02	26	2	2,2	21,5	110	2	—	25	170.137
A2BNSN26M03	26	3	3,0	21,5	150	2	—	40	170.137
A2BNSN26J03	26	3	3,0	21,5	110	2	—	40	170.137
A2BNSN26G03	26	3	3,0	21,5	90	2	—	40	170.137
A2BNSN26J04	26	4	4,0	21,5	110	3	—	40	170.137
A2BNSN26J05	26	5	5,0	21,4	110	4	—	40	170.130
A2BNSN26J06	26	6	6,0	21,4	110	5	—	40	170.130
A2BNSN32M1B15	32	1B	1,4	25,1	150	2	30	15	170.137
A2BNSN32M0119	32	1	1,6	25,1	150	2	38	19	170.137
A2BNSN32M02	32	2	2,2	25,1	150	2	—	60	170.137
A2BNSN32H03	32	3	3,0	25,1	100	2	—	50	170.137
A2BNSN32M03	32	3	3,0	25,1	150	2	—	50	170.137
A2BNSN32M04	32	4	4,0	25,1	150	3	—	50	170.137
A2BNSN32M05	32	5	5,0	25,0	150	4	—	60	170.130
A2BNSN32M06	32	6	6,0	25,0	150	5	—	60	170.130
A2BNSN52X08	52	8	8,0	45,2	260	7	—	120	170.132

ПРИМЕЧАНИЕ: ключи 170.137 и 170.130 заказываются отдельно.