


Нарезание резьбы

Пластины Top Notch™ для резбонарезания

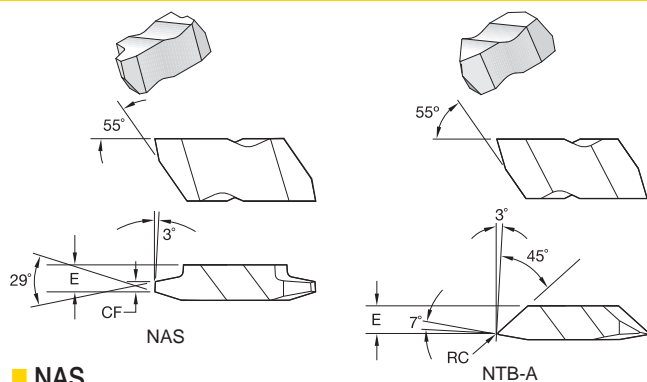

● лучший выбор
○ альтернативный выбор

P	●	●	●	●	●	●
M	●	●	●	●	●	●
K	○	●	●	●	●	●
N	●	○	○	○	○	●
S	●	●	●	●	●	○
H	○	○	○	○	○	○


■ NAS

номер по каталогу	размер пластины	RC	CF	E	нитек/дюйм	K68	KCU10	KCU25	KC5010	KC5025	KC5410
правое исполнение		мм	мм	мм							
NAS3R10	3	—	0,940	3,79	10	●	●	●	●	●	●
NAS3R12	3	—	0,828	3,79	12	●	●	●	●	●	●
NAS3R14	3	—	0,701	3,79	14	●	●	●	●	●	●
NAS3R16	3	—	0,605	3,79	16	●	●	●	●	●	●
NAS3R4	3	—	2,550	3,79	—	●	●	●	●	●	●
NAS3R5	3	—	2,014	3,79	5	●	●	●	●	●	●
NAS3R6	3	—	1,656	3,79	6	●	●	●	●	●	●
NAS3R8	3	—	1,209	3,79	8	●	●	●	●	●	●
левое исполнение											
NAS3L10	3	—	0,940	3,79	10	●	●	●	●	●	●
NAS3L12	3	—	0,828	3,79	12	●	●	●	●	●	●
NAS3L16	3	—	0,605	3,79	16	●	●	●	●	●	●
NAS3L4	3	—	2,550	3,79	—	●	●	●	●	●	●
NAS3L5	3	—	2,014	3,79	5	●	●	●	●	●	●
NAS3L6	3	—	1,656	3,79	6	●	●	●	●	●	●
NAS3L8	3	—	1,209	3,79	8	●	●	●	●	●	●


■ NTB-A

номер по каталогу	размер пластины	RC	E	нитек/дюйм	K68	KCU10	KCU25	KC5010	KC5025	KC5410
правое исполнение		мм	мм							
NTB2RA	2	0,08	3,20	16-20	●	●	●	●	●	●
NTB3RA	3	0,17	4,17	8-16	●	●	●	●	●	●
NTB4RA	4	0,25	5,23	4-6	●	●	●	●	●	●
левое исполнение										
NTB2LA	2	0,08	3,20	16-20	●	●	●	●	●	●
NTB3LA	3	0,17	4,17	8-16	●	●	●	●	●	●
NTB4LA	4	0,25	5,23	4-6	●	●	●	●	●	●

Формы резьбы



Укороченная трапецидальная резьба Acme



Американская резьба Buttress (Push)