



Пластины семейства KENLOC™




См. стр. А6–А7 с
дополнительными
сведениями о пластинах

ПРИМЕЧАНИЕ. H=N1

■ PCLN 95°

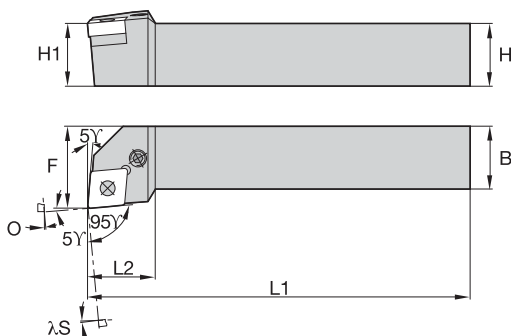


Номер по каталогу	H	B	F	L1	L2	FA	L1A	λS°	γO°	Эталонная пластина	Опорная пластина	Втулка клина	Толкатель втулки	Рычаг	Зажимной винт	Отв. под Torx+
правостороннее исполнение																
PCLNR1616H12	16	16	20,0	100	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNR2020K12	20	20	25,0	125	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNR2525M12	25	25	32,0	150	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNR2525M16	25	25	32,0	150	28,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNR2525M19	25	25	32,0	150	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
PCLNR3225P12	32	25	32,0	170	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNR3225P16	32	25	32,0	170	38,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNR3232P16	32	32	40,0	170	36,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNR3232P19	32	32	40,0	170	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
PCLNR4040S19	40	40	50,0	250	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
левостороннее исполнение																
PCLNL1616H12	16	16	20,0	100	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNL2020K12	20	20	25,0	125	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNL2525M12	25	25	32,0	150	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNL2525M16	25	25	32,0	150	28,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNL2525M19	25	25	32,0	150	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
PCLNL3225P12	32	25	32,0	170	26,0	—	—	-6,0	-6,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCLNL3225P16	32	25	32,0	170	38,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNL3225P19	32	25	32,0	170	38,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
PCLNL3232P16	32	32	40,0	170	36,0	—	—	-6,0	-6,0	CN..160612	512.117	513.025	515.022	511.025	514.125	15 IP
PCLNL3232P19	32	32	40,0	170	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
PCLNL4040S19	40	40	50,0	250	36,0	—	—	-6,0	-6,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP



См. стр. А6–А7 с
дополнительными
сведениями о пластинах

ПРИМЕЧАНИЕ. H=N1

■ PCSN 45°

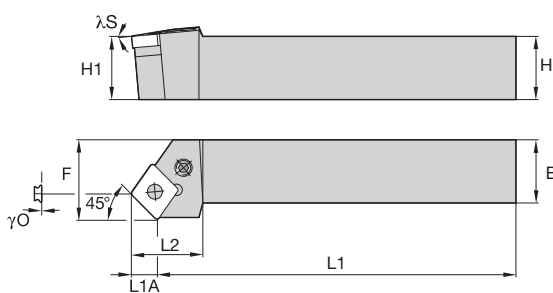

Номер по каталогу	H	B	F	L1	L2	FA	L1A	λS°	γO°	Эталонная пластина	Опорная пластина	Втулка клина	Толкатель втулки	Рычаг	Зажимной винт	Отв. под Torx+
правостороннее исполнение																
PCSNR2020K12	20	20	25,0	125	26,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNR2525M12	25	25	32,0	150	28,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNR3225P12	32	25	32,0	170	32,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNR3232P19	32	32	40,0	170	40,0	12,7	12,7	0,0	-8,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP
левостороннее исполнение																
PCSNL2020K12	20	20	25,0	125	26,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNL2525M12	25	25	32,0	150	28,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNL3225P12	32	25	32,0	170	32,0	8,5	8,5	0,0	-8,0	CN..120408	512.112	513.023	515.018	511.023	514.123	15 IP
PCSNL3232P19	32	32	40,0	170	40,0	12,7	12,7	0,0	-8,0	CN..190612	512.123	513.033	515.022	511.033	514.133	25 IP

Пример заказа:

Правостороннее исполнение: PCSNR2020K12

Левостороннее исполнение: PCSNL2020K12