



См. стр. A22–A23
с дополнительными
сведениями о пластинах

ПРИМЕЧАНИЕ. H=N1

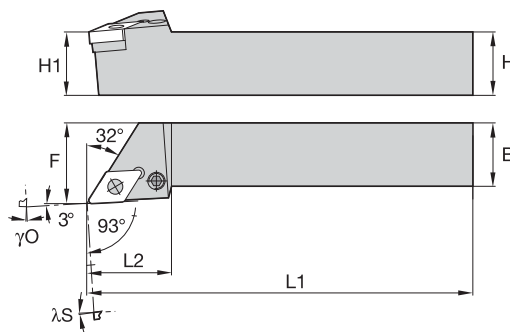

■ PDJN 93°


Номер по каталогу	H	B	F	L1	L2	FA	L1A	λS°	γO°	Эталонная пластина	Опорная пластина	Втулка клина	Толкатель втулки	Рычаг	Зажимной винт	Отв. под Tox+
правостороннее исполнение																
PDJNR1616H11	16	16	20,0	100	22,0	—	—	-6,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNR2020K11	20	20	25,0	125	30,0	—	—	-7,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNR2020K15	20	20	25,0	125	36,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNR2525M11	25	25	32,0	150	30,0	—	—	-7,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNR2525M15	25	25	32,0	150	36,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNR3225P15	32	25	32,0	170	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNR3232P15	32	32	40,0	170	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNR4025R15	40	25	32,0	200	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
левостороннее исполнение																
PDJNL1616H11	16	16	20,0	100	22,0	—	—	-6,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNL2020K11	20	20	25,0	125	30,0	—	—	-7,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNL2020K15	20	20	25,0	125	36,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNL2525M11	25	25	32,0	150	30,0	—	—	-7,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDJNL2525M15	25	25	32,0	150	36,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNL3225P15	32	25	32,0	170	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNL3232P15	32	32	40,0	170	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDJNL4025R15	40	25	32,0	200	38,0	—	—	-7,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP



См. стр. A22–A23
с дополнительными
сведениями о пластинах

ПРИМЕЧАНИЕ. H=N1

■ PDNN 62,5°

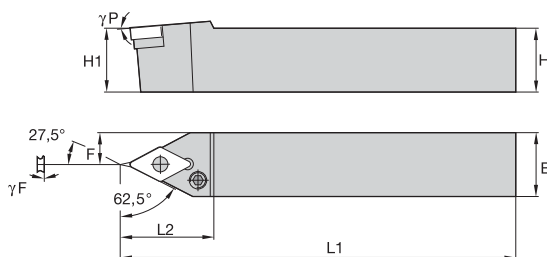

Номер по каталогу	H	B	F	L1	L2	FA	L1A	γF°	γP°	Эталонная пластина	Опорная пластина	Втулка клина	Толкатель втулки	Рычаг	Зажимной винт	Отв. под Tox+
правостороннее исполнение																
PDNNR2020K11	20	20	10,0	125	24,0	—	—	-6,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDNNR2020K15	20	20	10,0	125	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDNNR2525M15	25	25	12,5	150	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDNNR4025M15	40	25	12,5	150	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
левостороннее исполнение																
PDNNL2020K11	20	20	10,0	125	24,0	—	—	-6,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDNNL2020K15	20	20	10,0	125	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDNNL2525M11	25	25	12,5	150	30,0	—	—	-6,0	-6,0	DN..110408	512.060	513.060	515.018	511.060	514.118	10 IP
PDNNL2525M15	25	25	12,5	150	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP
PDNNL4025M15	40	25	12,5	150	36,0	—	—	-6,0	-6,0	DN..150608	512.153	513.023	515.018	511.024	514.128	15 IP

Пример заказа:

Правостороннее исполнение: PDNNR2020K15

Левостороннее исполнение: PDNNL2020K15