


См. стр. А66–А67
с дополнительными
сведениями о пластинах

ПРИМЕЧАНИЕ. H=H1

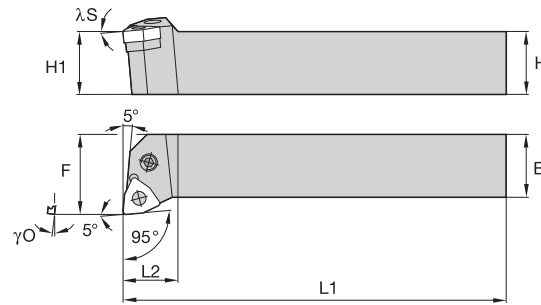

■ PWLN 95°

Номер по каталогу	H	B	F	L1	L2	FA	L1A	λS°	γO°	Эталонная пластина	Опорная пластина	Втулка клина	Толкатель втулки	Рычаг	Зажимной винт	Отв. под Toptx+
правостороннее исполнение																
PWLNLR1616H06	16	16	20,0	100	14,0	—	—	-6,0	-6,0	WN..060404	512.134	513.018	515.018	511.018	514.118	10 IP
PWLNLR2020K06	20	20	25,0	125	14,0	—	—	-6,0	-6,0	WN..060404	512.134	513.018	515.018	511.018	514.118	10 IP
PWLNLR2020K08	20	20	25,0	125	20,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
PWLNLR2525M08	25	25	32,0	150	26,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
PWLNLR3225P08	32	25	32,0	170	26,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
левостороннее исполнение																
PWLNLR1616H06	16	16	20,0	100	14,0	—	—	-6,0	-6,0	WN..060404	512.134	513.018	515.018	511.018	514.118	10 IP
PWLNLR2020K06	20	20	25,0	125	14,0	—	—	-6,0	-6,0	WN..060404	512.134	513.018	515.018	511.018	514.118	10 IP
PWLNLR2020K08	20	20	25,0	125	20,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
PWLNLR2525M08	25	25	32,0	150	26,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP
PWLNLR3225P08	32	25	32,0	170	26,0	—	—	-6,0	-6,0	WN..080408	512.135	513.023	515.018	511.023	514.123	15 IP

Пример заказа:

Правостороннее исполнение: PWLNLR1616H06

Левостороннее исполнение: PWLNLR1616H06