



# Цельные твердосплавные сверла



## Сверла SE HP с подачей СОЖ

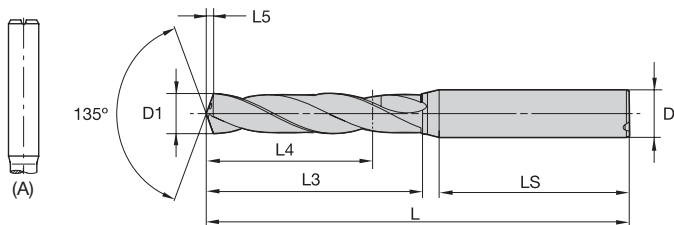

Допуск			
D1	Допуск m7	D	Допуск h6
>от 3 до 6	0,004/0,016	6	0,000/-0,008
>от 6 до 10	0,006/0,021	от 8 до 10	0,000/-0,009
>от 10 до 18	0,007/0,025	от 12 до 18	0,000/-0,011
>от 18 до 20	0,008/0,029	20	0,000/-0,013

● лучший выбор

○ альтернативный выбор

H	Grey	●
S	Orange	●
N	Green	○
K	Red	○
M	Yellow	○
P	Blue	○

### ■ B210\_HP

D1		номер заказа	номер по каталогу	D	L	L3	L4 max	L5	LS	КС7515
мм	дюйм									
3,000	.1181	2951464	B210A03000HP	6	62	20	14	0,6	36	●
3,175	.1250	2951589	B210A03175HP	6	62	20	14	0,6	36	●
3,300	.1299	2951465	B210A03300HP	6	62	20	14	0,6	36	●
3,500	.1378	2575493	B210A03500HP	6	62	20	14	0,7	36	●
3,700	.1457	2951466	B210A03700HP	6	62	20	14	0,7	36	●
4,000	.1574	2250867	B210A04000HP	6	66	24	17	0,7	36	●
4,200	.1654	2250868	B210A04200HP	6	66	24	17	0,8	36	●
4,500	.1772	2250869	B210A04500HP	6	66	24	17	0,8	36	●
5,000	.1968	2250870	B210A05000HP	6	66	28	20	0,9	36	●
5,100	.2008	2250871	B210A05100HP	6	66	28	20	0,9	36	●
5,200	.2047	2250872	B210A05200HP	6	66	28	20	1,0	36	●
5,400	.2126	2250883	B210A05400HP	6	66	28	20	1,0	36	●
5,500	.2165	2250884	B210A05500HP	6	66	28	20	1,0	36	●
5,800	.2283	2250885	B210A05800HP	6	66	28	20	1,1	36	●
6,000	.2362	2250886	B210A06000HP	6	66	28	20	1,1	36	●
6,100	.2402	2250887	B210A06100HP	8	79	34	24	1,2	36	●
6,300	.2480	2250888	B210A06300HP	8	79	34	24	1,2	36	●
6,500	.2559	2250889	B210A06500HP	8	79	34	24	1,2	36	●
6,800	.2677	2250890	B210A06800HP	8	79	34	24	1,3	36	●
6,900	.2716	2250891	B210A06900HP	8	79	34	24	1,3	36	●
7,000	.2756	2250892	B210A07000HP	8	79	34	24	1,3	36	●
7,100	.2795	2250893	B210A07100HP	8	79	34	24	1,3	36	●
7,500	.2953	2250894	B210A07500HP	8	79	34	24	1,4	36	●
7,800	.3071	2250895	B210A07800HP	8	79	34	24	1,4	36	●
8,000	.3149	2250896	B210A08000HP	8	79	34	24	1,5	36	●
8,100	.3189	2250897	B210A08100HP	10	89	47	35	1,5	40	●
8,200	.3228	2250898	B210A08200HP	10	89	47	35	1,5	40	●
8,400	.3307	2250899	B210A08400HP	10	89	47	35	1,6	40	●
8,500	.3346	2250900	B210A08500HP	10	89	47	35	1,6	40	●
8,600	.3386	2250901	B210A08600HP	10	89	47	35	1,6	40	●
8,700	.3425	2250902	B210A08700HP	10	89	47	35	1,6	40	●
9,000	.3543	2250903	B210A09000HP	10	89	47	35	1,7	40	●
9,500	.3740	2250904	B210A09500HP	10	89	47	35	1,8	40	●
9,700	.3819	2250905	B210A09700HP	10	89	47	35	1,8	40	●

(продолжение на следующей странице)