
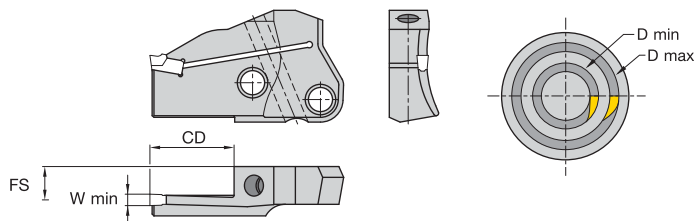


Обработка канавок и отрезка

Модульные лезвия АЗ™ для обработки глубоких канавок • Обработка торцевых канавок



■ Пластины АЗМ-В для наружных торцевых канавок

номер заказа	номер по каталогу	посадочный размер	D min	D max	W min	CD	FS	размер режущего лезвия
2542486	правое исполнение A3M50R312B025030	3S	25	30	3,00	12,0	10,50	50
2542487	A3M50R312B030035	3S	30	35	3,00	12,0	10,50	50
2542488	A3M50R316B035040	3S	35	40	3,00	16,0	10,50	50
2542489	A3M50R316B040050	3S	40	50	3,00	16,0	10,50	50
2542490	A3M50R316B050060	3S	50	60	3,00	16,0	10,50	50
1600165	A3M50R412B025030	4S	25	30	4,00	12,0	10,00	50
1600166	A3M50R412B030035	4S	30	35	4,00	12,0	10,00	50
1600167	A3M50R420B035040	4S	35	40	4,00	20,0	10,00	50
1600168	A3M50R420B040050	4S	40	50	4,00	20,0	10,00	50
1600169	A3M50R420B050060	4S	50	60	4,00	20,0	10,00	50
1600170	A3M50R426B060075	4	60	75	4,00	26,0	10,00	50
1600171	A3M50R426B075100	4	75	100	4,00	26,0	10,00	50
1600172	A3M50R426B100180	4	100	180	4,00	26,0	10,00	50
1600173	A3M50R426B180250	4	180	250	4,00	26,0	10,00	50
1600174	A3M50R426B250350	4	250	350	4,00	26,0	10,00	50
1600175	A3M50R426B350999	4	350	—	4,00	26,0	10,00	50
1600176	A3M50R526B060075	5+6	60	75	5,00	26,0	9,50	50
1600177	A3M50R532B075100	5+6	75	100	5,00	32,0	9,50	50
1600178	A3M50R532B100180	5+6	100	180	5,00	32,0	9,50	50
1600179	A3M50R532B180250	5+6	180	250	5,00	32,0	9,50	50
1600180	A3M50R532B250350	5+6	250	350	5,00	32,0	9,50	50
1600191	A3M50R532B350999 левое исполнение	5+6	350	—	5,00	32,0	9,50	50
2542491	A3M50L312B025030	3S	25	30	3,00	12,0	10,50	50
2542492	A3M50L312B030035	3S	30	35	3,00	12,0	10,50	50
2542493	A3M50L316B035040	3S	35	40	3,00	16,0	10,50	50
2542494	A3M50L316B040050	3S	40	50	3,00	16,0	10,50	50
2542495	A3M50L316B050060	3S	50	60	3,00	16,0	10,50	50
1600192	A3M50L412B025030	4S	25	30	4,00	12,0	10,00	50
1600193	A3M50L412B030035	4S	30	35	4,00	12,0	10,00	50
1600194	A3M50L420B035040	4S	35	40	4,00	20,0	10,00	50
1600195	A3M50L420B040050	4S	40	50	4,00	20,0	10,00	50
1600196	A3M50L420B050060	4S	50	60	4,00	20,0	10,00	50
1600197	A3M50L426B060075	4	60	75	4,00	26,0	10,00	50
1600198	A3M50L426B075100	4	75	100	4,00	26,0	10,00	50
1600212	A3M50L426B100180	4	100	180	4,00	26,0	10,00	50
1600213	A3M50L426B180250	4	180	250	4,00	26,0	10,00	50
1600214	A3M50L426B250350	4	250	350	4,00	26,0	10,00	50
1600215	A3M50L426B350999	4	350	—	4,00	26,0	10,00	50
1600216	A3M50L526B060075	5+6	60	75	5,00	26,0	9,50	50
1600217	A3M50L532B075100	5+6	75	100	5,00	32,0	9,50	50
1600218	A3M50L532B100180	5+6	100	180	5,00	32,0	9,50	50
1600219	A3M50L532B180250	5+6	180	250	5,00	32,0	9,50	50
1600241	A3M50L532B250350	5+6	250	350	5,00	32,0	9,50	50
1600242	A3M50L532B350999	5+6	350	—	5,00	32,0	9,50	50

Обработка канавок и отрезка