



См. стр. A118 с дополнительными сведениями о пластинах

ПРИМЕЧАНИЕ. H = H1

■ SSSC 45°

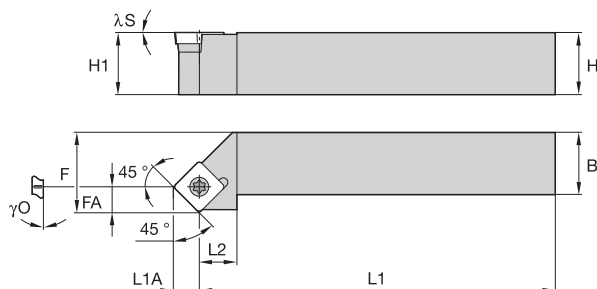


Номер по каталогу	H	B	F	L1	L2	FA	L1A	λS°	γO°	Эталонная пластина	Опорная пластина	Винт клина	Шестиграннык (мм)	Винт пластины	Torx
правостороннее исполнение															
SSSCR1212N09	12	12	16,0	160	18,0	6,1	6,1	0.0	0.0	SC..09T308	—	—	—	MS1155	T15
SSSCR1616H09	16	16	20,0	100	18,0	6,1	6,1	0.0	0.0	SC..09T308	SKSP343	SRS3	3.5 MM	MS1156	T15
SSSCR1616H12	16	16	20,0	100	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15
SSSCR2020K12	20	20	25,0	125	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15
SSSCR2525M12	25	25	32,0	150	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15
левостороннее исполнение															
SSSCL1212N09	12	12	16,0	160	18,0	6,1	6,1	0.0	0.0	SC..09T308	—	—	—	MS1155	T15
SSSCL1616H09	16	16	20,0	100	18,0	6,1	6,1	0.0	0.0	SC..09T308	SKSP343	SRS3	3.5 MM	MS1156	T15
SSSCL1616H12	16	16	20,0	100	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15
SSSCL2020K12	20	20	25,0	125	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15
SSSCL2525M12	25	25	32,0	150	25,0	8,3	8,3	0.0	0.0	SC..120408	SKSP453	SRS4	4 MM	MS1158	T15



См. стр. A124–A125 с дополнительными сведениями о пластинах

ПРИМЕЧАНИЕ. H = H1

■ STFC 90°

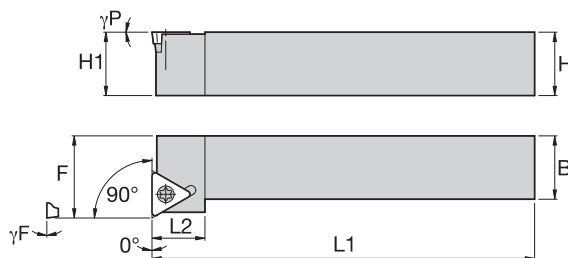

Номер по каталогу	H	B	F	L1	L2	FA	L1A	γF°	γP°	Эталонная пластина	Опорная пластина	Винт клина	Шестиграннык (мм)	Винт пластины	Torx
правостороннее исполнение															
STFCR1616H11	16	16	20,0	100	16,0	—	—	0.0	0.0	TC..110204	—	—	—	MS1153	T7
STFCR1616H16	16	16	20,0	100	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15
STFCR2020K16	20	20	25,0	125	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15
STFCR2525M16	25	25	32,0	150	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15
левостороннее исполнение															
STFCL1010M11	10	10	12,0	150	13,0	—	—	0.0	0.0	TC..110204	—	—	—	MS1153	T7
STFCL1212N11	12	12	16,0	160	13,0	—	—	0.0	0.0	TC..110204	—	—	—	MS1153	T7
STFCL1616H16	16	16	20,0	100	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15
STFCL2020K16	20	20	25,0	125	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15
STFCL2525M16	25	25	32,0	150	20,0	—	—	0.0	0.0	TC..16T308	SKTP343	SRS3	3.5 MM	MS1156	T15

Пример заказа:

Правостороннее исполнение: STFCR1616H16

Левостороннее исполнение: STFCL1616H16