

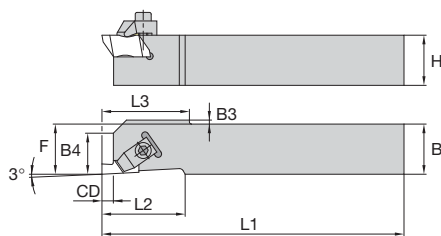


Резьбовые резцы TOP NOTCH™ для нарезания резьбы


Дополнительные сведения о пластинах см. на стр. Е9.

**NAS**

Эталонная пластина	Номер по каталогу	H	B	F	L1	L2	B4	CD	B3	L3	Прижим	Винт прижима	Отв. под Torx / Torx+
Правая													
N.2R	NASR1010M2Q	10	10	10	150	19	9	3,5	2,03	19	CM182	MS1200	T10
N.2R	NASR1212M2Q	12	12	12	150	19	9	3,5	—	—	CM182	MS1200	T10
N.3R	NASR1616K3Q	16	16	16	125	32	12	5,3	—	—	CM184LP	MS2111	25 IP
Левая													
N.2L	NASL1010M2Q	10	10	10	150	19	9	3,5	2,03	19	CM183	MS1200	T10
N.2L	NASL1212M2Q	12	12	12	150	19	9	3,5	—	—	CM183	MS1200	T10
N.3L	NASL1616K3Q	16	16	16	125	32	12	5,3	—	—	CM185LP	MS2111	25 IP



Дополнительные сведения о пластинах см. на стр. Е9.

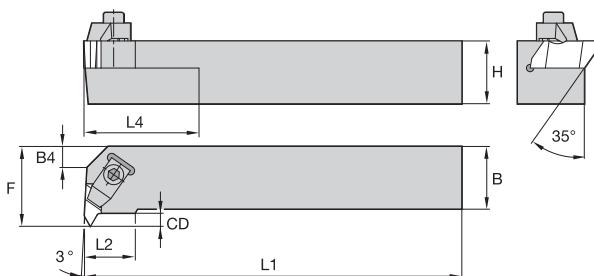**NE**

Эталонная пластина	Номер по каталогу	H	B	F	L1	L2	B4	CD	Прижим	Винт прижима	Отв. под Torx / Torx+
Правая											
N.2L	NER1616H2	16	16	20	100	15	—	3,5	CM75	MS1200	T10
N.2L	NER2020K2	20	20	25	125	15	—	3,5	CM75	MS1200	T10
N.2L	NER2525M2	25	25	32	150	15	—	3,5	CM75	MS1200	T10
N.3L	NER2525M3	25	25	32	150	22	—	5,3	CM73LP	—	25 IP
N.3L	NER3225P3	32	25	32	170	22	—	3,8	CM73LP	—	25 IP
N.4L	NER2525M4	25	25	35	150	24	—	7,5	CM73LP	—	25 IP
N.4L	NER3225P4	32	25	35	170	24	—	7,5	CM73LP	—	25 IP
N.4L	NER3232P4	32	32	40	170	24	—	6,4	CM73LP	—	25 IP
N.5L	NER3232P5	32	32	50	170	35	—	10,5	CM81	MS352	6 MM
Левая											
N.2R	NEL1616H2	16	16	20	100	15	—	3,5	CM74	MS1200	T10
N.2R	NEL2020K2	20	20	25	125	15	—	3,5	CM74	MS1200	T10
N.2R	NEL2525M2	25	25	32	150	15	—	3,5	CM74	MS1200	T10
N.3R	NEL2525M3	25	25	32	150	22	—	5,3	CM72LP	—	25 IP
N.3R	NEL3225P3	32	25	32	170	22	—	3,8	CM72LP	—	25 IP
N.4R	NEL2525M4	25	25	35	150	24	—	7,5	CM72LP	—	25 IP
N.4R	NEL3225P4	32	25	35	170	24	—	7,5	CM72LP	—	25 IP
N.4R	NEL3232P4	32	32	40	170	24	—	6,4	CM72LP	—	25 IP
N.5R	NEL3232P5	32	32	50	170	35	—	10,5	CM80	MS352	6 MM

ПРИМЕЧАНИЕ. Размер F измеряется по канавочной пластине типа TOP NOTCH с острыми (неизношенными) кромками.

Пример заказа:

NER1616H2